



Zubehör „schwarz“

Vulkanisierte Neopren-Andruckspindeln


- Schwarzes Neopren mit schwarzen Schrauben und Muttern
- Öl- und LABS-frei
- Härte 80 – 85 Shore A
- Inclusive Kontermutter



Spindel „schwarz“		Ø D	G	L	L1
213208-M-L-S	●	6	M5	32	28
213208-M-L-S-82	●	6	M5	82	78
217208-M-L-S	●	7	M6	43	38
217208-M-L-S-83	●	7	M6	83	78



Spindel „schwarz“		Ø D	G	L	L1
213208-M852-S	●	10	M5	34	30
213208-M852-84	●	10	M5	84	80

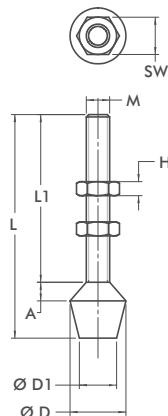

Spindel „schwarz“		Ø D	Ø D1	G	L	L1
202208-M851-S	●	16	12	M6	44	30
202208-M851-84	●	16	12	M6	84	70
225208-M853-S	●	21	14	M8	53	35
225208-M853-83	●	21	14	M8	83	65