


## EH 23080.

### Sechskantmutter mit Bund

DIN 6331  
(Höhe 1,5 d)

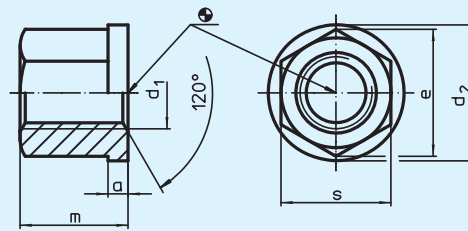

Anziehdrehmomente und Festigkeiten siehe Anhang - Technische Daten -

#### Werkstoff:

- Vergütungsstahl, vergütet, Güte 10, phosphatiert
- Rostfreier Stahl 1.4305

Best.-Nr. Vergütungsstahl	Best.-Nr. Rostfreier Stahl*	d <sub>1</sub>	a	d <sub>2</sub>	e	m	Vergütungsstahl s	Rostfreier Stahl s	g
23080.0006	–	M 6	3,0	14	11,5	9	10	–	5
23080.0008	23080.0108	M 8	3,5	18	15,0	12	13	13	12
23080.0010	23080.0110	M 10	4,0	22	18,5	15	16	17	22
23080.0012	23080.0112	M 12	4,0	25	20,8	18	18	19	30
23080.0014*	–	M 14	4,0	28	24,2	21	21	–	47
23080.0016	23080.0116	M 16	5,0	31	27,7	24	24	24	67
23080.0018*	–	M 18	5,0	34	31,2	27	27	–	97
23080.0020	23080.0120	M 20	6,0	37	34,6	30	30	30	129
23080.0022*	–	M 22	6,0	40	39,3	33	34	–	179
23080.0024	–	M 24	6,0	45	41,6	36	36	–	221
23080.0030	–	M 30	8,0	58	53,1	45	46	–	468
23080.0036	–	M 36	10,0	68	63,5	54	55	–	783

\* Abmessungen sind nicht in der DIN enthalten.

