

EH 23100.

Mitnehmer- steine

DIN 2079

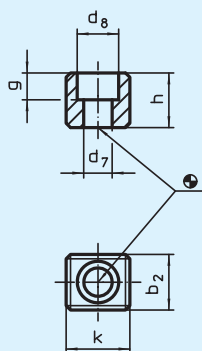


Bild 1

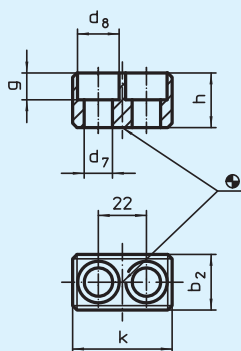


Bild 2

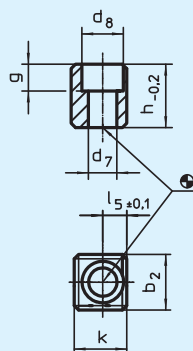


Bild 3

Werkstoff:

- Legierter Einsatzstahl, einsatzgehärtet, brüniert, geschliffen

Best.-Nr.	Ausführung	Spindel- kopf Nr.	k	b ₂ h ₅	d ₇	d ₈	g	h	l ₅	zugehörige Schraube ISO 4762	g
23100.0030	für Spindelköpfe	30	16,5	15,9	6,4	10,4	6,2	16,0	–	M 6 x 16	25
23100.0040	Nr. 30 bis 60,	40	19,5	15,9	6,4	10,4	6,2	16,0	–	M 6 x 16	31
23100.0045	Form A	45	19,5	19,0	8,4	13,5	8,3	19,0	–	M 8 x 20	38
23100.0050	(Bild 1)	50-55	26,5	25,4	13,0	19,0	12,3	25,0	–	M 12 x 25	85
23100.0060		60	45,5	25,4	13,0	19,0	12,3	25,0	–	M 12 x 25	179
23100.0160	für Spindelköpfe Nr. 60, Form B (Bild 2)	60	45,5	25,4	13,0	19,0	12,3	25,0	–	M 12 x 25	140
23100.0230	für Spindelköpfe	30	13,5	15,9	6,4	10,4	6,2	24,5	5,5	M 6 x 25	30
23100.0240	Nr. 30 bis 50,	40	16,5	15,9	6,4	10,4	6,2	24,5	7,0	M 6 x 25	39
23100.0245	Form C	45	17,5	19,0	8,4	13,5	10,0	26,0	7,5	M 8 x 25	47
23100.0250	(Bild 3)	50	24,0	25,4	13,0	19,0	12,3	29,0	11,0	M 12 x 30	89

