

## EH 24460.

### Drehbare Ballengriffe

DIN 98

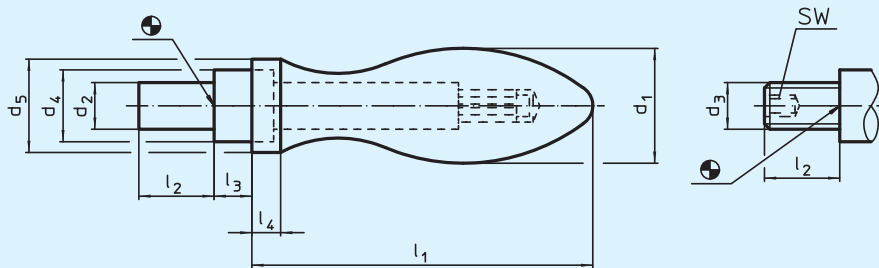


Bild 1

Bild 2

#### Werkstoff:

- Stahl, gedreht, galvanisch verzinkt, passiviert

Best.-Nr.	Ausführung	d <sub>1</sub>	d <sub>2</sub> h8	d <sub>3</sub>	d <sub>4</sub> h13	d <sub>5</sub>	l <sub>1</sub> ≈	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	SW	g
24460.0016	mit glattem Zapfen,	16	7	–	10	14	49	11	5,5	5,0	–	53
24460.0020	Form D	20	8	–	13	18	61	13	6,0	6,0	–	109
24460.0025	(Bild 1)	25	10	–	16	21	75	14	8,0	6,5	–	200
24460.0032		32	13	–	20	26	95	21	10,5	8,0	–	395
24460.0036		36	16	–	22	29	106	26	11,0	9,0	–	569
24460.0116	mit Gewindezapfen,	16	–	M 6	10	14	49	11	5,5	5,0	3	51
24460.0120	Form E	20	–	M 8	13	18	61	13	6,0	6,0	4	101
24460.0125	(Bild 2)	25	–	M 10	16	21	75	14	8,0	6,5	5	193
24460.0132		32	–	M 12	20	26	95	21	10,5	8,0	6	387
24460.0136		36	–	M 16	22	29	106	26	11,0	9,0	8	566

