

Vakuum Produkte – Standard Vakuum Sauger Runde Flach-Sauger

Zöllige Ausführung

Ø2.00"	CPI-20FF-(M)-(DR)
Ø3.00"	CPI-30FF-(M)-(DR)
Ø4.00"	CPI-40FF-(M)-(DR)
Ø5.00"	CPI-50FF-(M)-(DR)

(M) = verfügbare Anschlußgeometrie

K B C D 40FF 50FF E1

Metrische Ausführung

Ø50mm	CPI-50PF-(M)-(DR)
Ø75mm	CPI-75PF-(M)-(DR)
Ø100mm	CPI-100PF-(M)-(DR)
Ø125mm	CPI-125PF-(M)-(DR)

(M) = verfügbare Anschlußgeometrie

A B C



(DR) = Shorehärte

30 45 60

Runde Flach-Sauger Serie CC

Ø1.25"	CPI-10CC-U18-60
--------	-----------------



Zöllige Ausführung

Ø2.00"	CPI-20DD-(M)-(DR)
Ø3.00"	CPI-30DD-(M)-(DR)
Ø4.00"	CPI-40DD-(M)-(DR)

(M) = verfügbare Anschlußgeometrie

K B C

Metrische Ausführung

Ø50mm	CPI-50DM-(M)-(DR)
Ø75mm	CPI-75DM-(M)-(DR)
Ø100mm	CPI-100DM-(M)-(DR)

(M) = verfügbare Anschlußgeometrie

A B C

Runde Glocken-Sauger



(DR) = Shorehärte

30 45 ~~60~~

Zöllige Ausführung

1.50" x 3.00"	CPI-153FF-(M)-(DR)
2.00" x 4.00"	CPI-24FF-(M)-(DR)
2.50" x 5.00"	CPI-255FF-(M)-(DR)
3.00" x 6.00"	CPI-36FF-(M)-(DR)

(M) = verfügbare Anschlußgeometrie

K B C D 24FF E1 24FF


Metrische Ausführung

40 x 75mm	CPI-40-75PF-(M)-(DR)
50 x 100mm	CPI-50-100PF-(M)-(DR)
63 x 125mm	CPI-63-125PF-(M)-(DR)
75 x 150mm	CPI-75-150PF-(M)-(DR)

(M) = verfügbare Anschlußgeometrie

A B C ~~63-125PF~~

Ovale Glocken-Sauger

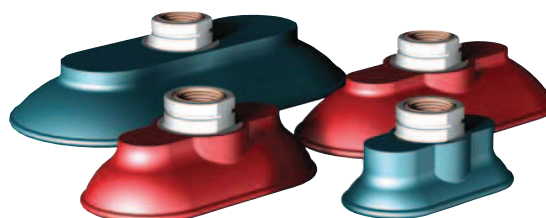

(DR) = Shorehärte

30 45 ~~60~~