


Andruckspindel Kegel Inch


- Schwarzes, vulkanisiertes Neopren-Druckstück, labsfrei (Härte 70-80 Shore)
- Temperaturbeständig: -20°C bis 100°C [-22°F bis 212°F]
- Ölresistent, labss- (Silikon) frei
- Inkl. 2 Befestigungsmuttern

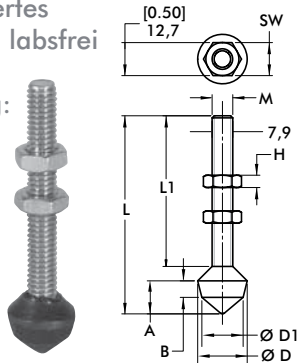

Art. Nr.	M	L	L1	SW	H	A	B	ØD	ØD1
305208	#10-32	[1.50] 38,1	[1.00] 25,4	[0.38] 9,5	[0.13] 3,3	[0.38] 9,5	[0.19] 4,8	[0.56] 14,2	[0.44] 11,2
213208	1/4-20	[2.25] 57,2	[1.56] 39,6	[0.44] 11,2	[0.16] 4,0				
509208	5/16-18	[3.00] 76,2	[2.28] 57,9	[0.50] 12,7	[0.19] 4,8	[0.50] 12,7	[0.25] 6,4	[0.75] 19,1	[0.63] 16
519208		[5.50] 139,7	[4.75] 120,7						
210208	3/8-16	[3.50] 88,9	[2.50] 63,5	[0.56] 14,2	[0.23] 5,8	[0.75] 19,1	[0.41] 10,4	[0.88] 22,4	[0.75] 19,1

Große Gelenk-Andruckspindel Inch


- Weißes Neopren-Druckstück, Härte: 70-80 Shore
- Temperaturbeständig: -40°C bis 105°C [-40°F bis 220°F]
- Neopren - Druckstück
- Inkl. 2 Befestigungsmuttern



Art. Nr.	M	L	L1	SW	H	A	ØD	Schwenkwinkel
207209	1/4-20	[2.56] 65	[1.56] 39,6	[0.44] 11,2	[0.16] 4		[1.00] 25,4	14°
507209	5/16-18	[2.98] 75,7	[1.94] 49,3	[0.50] 12,7	[0.19] 4,8	[0.31] 8	[1.50] 38,1	24°
210209	3/8-16	[3.56] 90,4	[2.44] 62	[0.56] 14,2	[0.23] 5,8		[2.00] 50,8	26°

Federnde Andruckspindel


- Geeignet für Schubstangenspanner
- Interne Feder ermöglicht Toleranzausgleich in der Materialstärke
- Verzinkt
- Inkl. 1 Befestigungsmutter



Art. Nr.	M	L	L1	ØD	Max. Federweg S	Federkonstante [lbf./in] N/mm	Max. Kraft [lbf.] N
905	5/16-18	[2.50] 63,5	[0.75] 19,1	[0.88] 22,2	[0.19] 4,8	[750]	[135]
905-M	M8					131	600
920	3/8-16	[3.63] 92,2	[1.13] 28,6		[0.38] [9,6]	[822]	[308]
920-M	M10				144	1370	

Gelenk-Andruckspindel

- Inkl. 2 Befestigungsmuttern

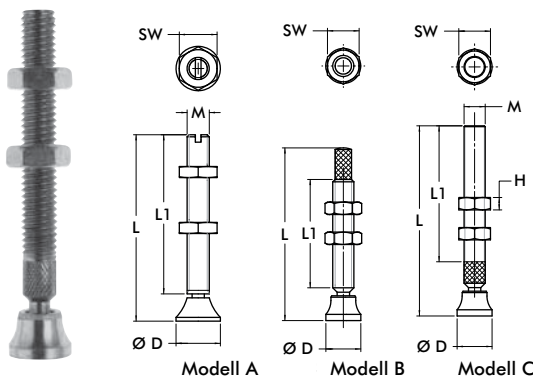

Art. Nr.	M	Modell	L	L1	SW	H	ØD	Schwenkwinkel
207206-M	M6	A	[2.44] 62	[2.13] 54	[0.39] 10	[0.13] 3,2	[0.47] 12	30°
507206-M	M8		[2.87] 73	[2.46] 62,5	[0.51] 13	[0.16] 4	[0.63] 16	
468206-M	M10	B	[3.00] 76,2	[2.00] 50,8	[0.67] 17	[0.20] 5	[0.79] 20	24°
210206-M		A	[3.31] 84	[2.80] 71				
250206-M	M12	A	[4.72] 120	[4.13] 105	[0.75] 19	[0.24] 6	[0.98] 25	30°
207206	1/4-20	C	[2.38] 60,5	[1.56] 39,6	[0.44] 11,2	[0.16] 4	[0.50] 12,7	14°
507206	5/16-18		[2.75] 69,9	[1.94] 49,3	[0.50] 12,7	[0.19] 4,8	[0.56] 14,2	
468206	3/8-16	B	[3.06] 77,7	[1.92] 48,8	[0.56] 14,2	[0.23] 5,8	[0.63] 16	24°
210206		C	[3.38] 85,9	[2.41] 61,2				
250206	1/2-13	C	[4.63] 117,6	[3.44] 87,4	[0.75] 19,1	[0.31] 7,9	[1.00] 25,4	24°