

ACCELERATE® COLLECTION VACUUM CUPS

Vacuum Products | Dimensions | Ordering Information

TC Polyurethane Oval Bellows




Specifications:

Temperature:
10°-49° C [50°-120° F]
Materials: Dual Durometer Polyurethane - Outside 55 durometer (red), internal treads 60 durometer (dark green).



Positioning Kit (for G38 and P38 thread mounts only). Sold separately. Order No. **CPI-LNB-VSA-19** Includes (1) O-ring and (1) locknut.

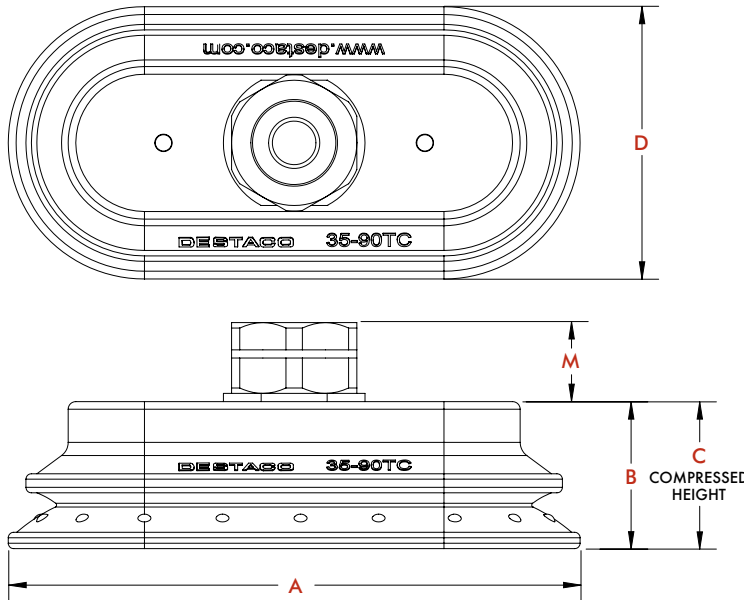

Mount	M
U38/G38	[0.57]
	14.5
P38	[0.85]
	21.5
C	[0.73]
	18.5

Dimensions shown "[inch] mm"

TC Dimensions

Model	A	B	C	D	Weight
35-90TC	[4.13]	[1.08]	[0.65]	[1.30]	[3.42 oz]
	105	27.5	16.5	33	97 g
50-140TC	[6.18]	[1.40]	[0.85]	[1.97]	[6.70 oz]
	157	35.5	21.5	50	190 g
65-170TC	[7.36]	[1.63]	[1.04]	[3.23]	[10.93 oz]
	187	41.5	26.5	82	310 g

Dimensions shown "[inch] mm"

TC Holding Capacity @ -0.6 bar vacuum

Appl.	Vert. Lift	Horz. Dry	Horz. Wet
35-90TC	[45]	[40]	[34]
	20.41	18.14	15.42
50-140TC	[99]	[93]	[78]
	44.91	42.18	35.38
65-170TC	[128]	[139]	[149]
	58.06	63.05	67.59


Holding capacities shown "[lbs] kg"

TC Oval Bellows Ordering Information

Metric

Ø33x105mm VC-35-90TC-(M)-PU55
 Ø50x157mm VC-50-140TC-(M)-PU55
 Ø82x187mm VC-65-170TC-(M)-PU55

Mounting Options ("M")

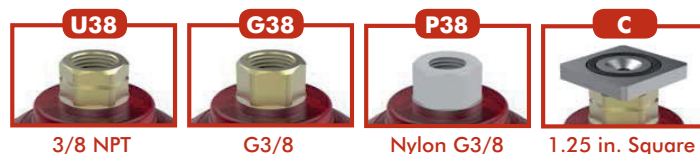

Dimensions and technical information are subject to change without notice