
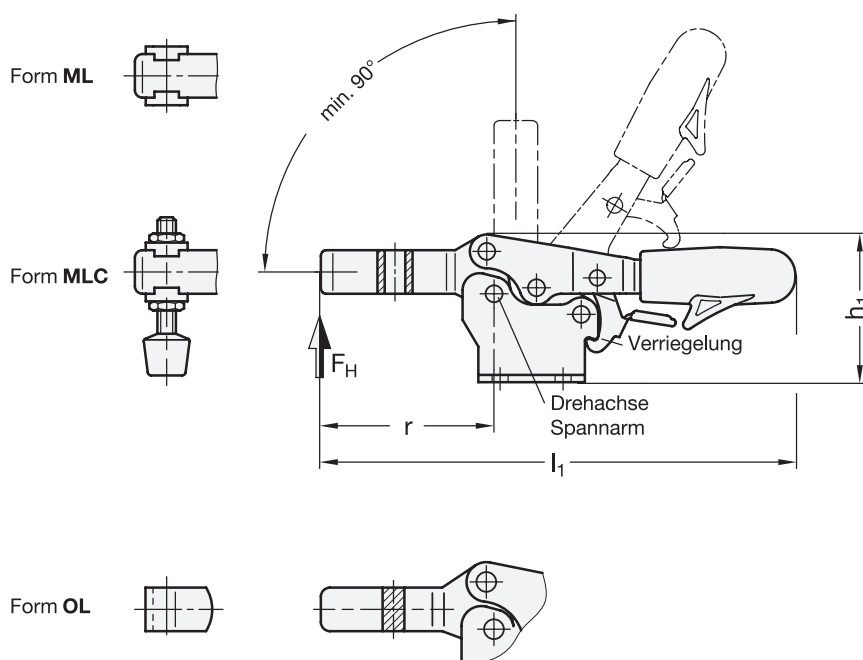


2 Form

- ML** offener Spannarm, mit 2 Flankenscheiben
- MLC** offener Spannarm, mit 2 Flankenscheiben und Andrückschraube GN 708.1
- OL** massiver Spannarm, mit Halteschelle zum Anschweißen

Funktionsprinzip

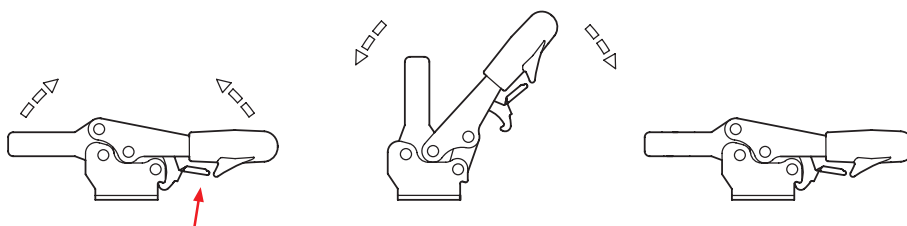

Größe		F _H in N	a ≈	b ₁	b ₂	b ₃	d ₁	d ₂	h ₁ ≈	h ₂	h ₃	h ₄	h ₅ max.
Stahl	Edelstahl	Haltekraft											
75	75	900	20	28	26	5,3	M 5	4,5	37	20	11	19	5
130	130	1000	32	36	40	6,3	M 6	5,6	51	30,5	16	25,5	14
230	230	1700	37	44	44	8,5	M 8	6,6	61,5	36,5	18	30	12,5
355	-	1800	58	60	58	10,5	M 10	8,6	83	50	22	37	23,5
455	-	3200	65	70	65	12,5	M 12	8,7	99	60	26	43	27,5

Größe		l ₁ ≈	l ₂ ≈	l ₃ ≈	l ₄ max.	l ₅	m ₁	m ₂	m ₃	r	s ₁	s ₂	w Verstellweg
Stahl	Edelstahl												
75	75	118	67	40	49,5	45	13,5	16	19	43	2	4	15
130	130	172	92	53	64	55	26	22,4	28,4	62	2,5	5	17,5
230	230	196	109	63,5	78	68	26	26	31,5	72	3	6	20
355	-	270	160	96	115	77	41	38,8	43	108,5	3,5	7	19
455	-	306	184	116	135	100	41,5	40	43	126	4	10	33